

# PRODUCT INFO SHEET

Nanmac Corporation

Quality • Performance • Solutions


## Flow-Thru Thermocouples and RTDs Male and Female NPT Unions D4A Series

Our 'Flow-Thru Thermocouples and RTDs' use either a right-angle ribbon thermocouple sensor or a Pt100 Ohm RTD. Utilizing a special ribbon element which eliminates conduction errors due to shallow immersion into the flowing gas or liquid within the pipeline. Additionally, this ribbon design provides response times within the low milliseconds. All Pt100 RTD devices are sanitary since the sensor is separated from the material in the pipeline by a 0.015 inch thick stainless steel diaphragm. For thermocouples requiring sanitary designs contact the factory.

### NOTES:

- Temperature Range: -320 to 1,250 degrees Fahrenheit
- Pressures up to 4,000psi
- Response Times: Thermocouples (20ms) and RTDs (3s)
- Available Types: Thermocouples (J, K, E & T) and RTDs (Pt100 2 wire standard)
- Termination: 3/8 inch OD stainless steel tube with standard size 2 pin male plug attached.
- Termination Styles: Transition to Flex Leads, Explosion Proof Connector Head, 3 or 4 wire RTD, Flexible Lead Wire, etc. (contact factory)
- Union Type: 316 stainless steel compression tube union

*RTDs come standard with diaphragm. Thermocouples with a diaphragm are available upon request.*

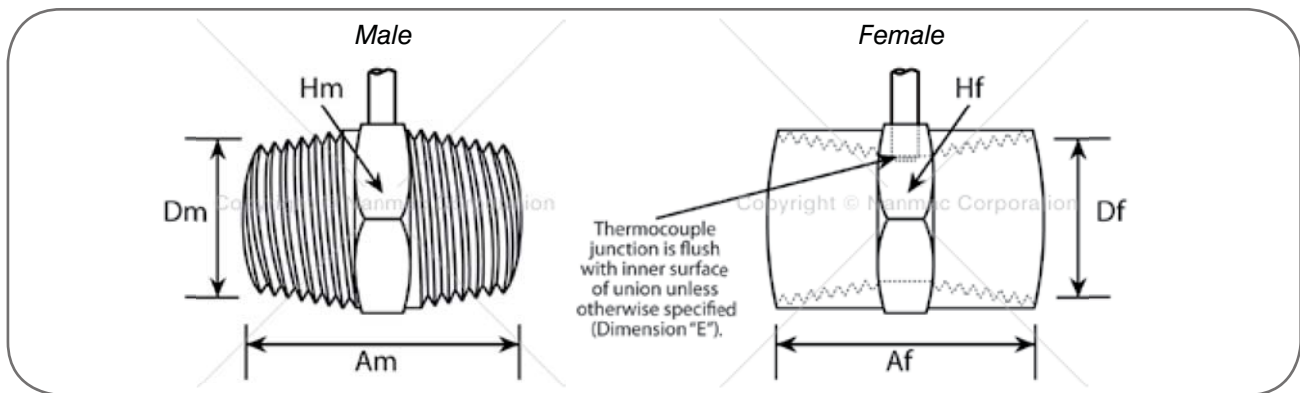

### Specifications

Part No.	Pipe Size	Male			Female			Maximum (psi)	
		Dm	Hm	Am	Df	Hf	Af	Male	Female
D4A-4	1/8	3/16	7/16	1-7/32	11/32	9/16	13/16	4,000	4,000
D4A-6	1/4	9/32	9/16	1-19/32	7/16	3/4	1-1/8	4,000	4,000
D4A-8	3/8	3/8	11/16	1-5/8	37/64	7/8	1-1/4	4,000	3,500
D4A-10	1/2	15/32	7/8	2	23/32	1-1/16	1-1/2	4,000	3,500
D4A-12	3/4	5/8	1-1/16	2	59/64	1-1/4	1-9/16	4,000	3,500
D4A-16	1	7/8	1-3/8	2-1/4	1-1/64	1-5/8	2	4,000	3,000
D4A-20	1-1/4	1-3/32	1-3/4	1-13/32	1-1/2	2-1/8	2-3/8	3,000	2,000
D4A-24	1-1/2	1-11/32	2-1/8	1-21/32	1-3/4	2-3/8	2-5/8	2,500	1,000
D4A-32	2	1-13/16	2-3/4	1-29/32	2-7/8	2-7/8	2-5/8	2,500	1,000

www.haopute.com  
info@haopute.com  
mobile:189 8218 5717

Foremost in Temperature Measurement™  
**NANMAC**